
LP7110AT

Dimensions:

Unit (mm)



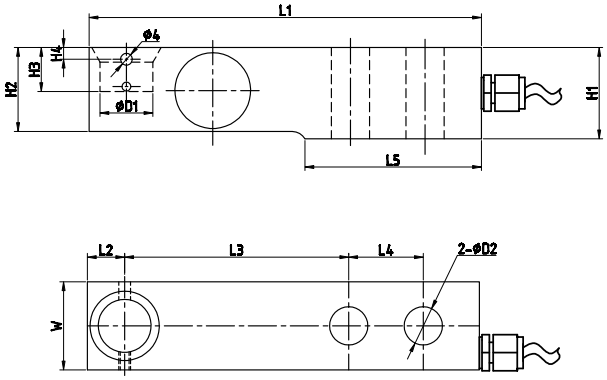

Rated Capacity	227/454/1134/2268/5099 kg	454/1134/2268 kg
Accuracy Class	C3	C6
Rated Output	2.0±0.002mV/V	
Temperature effect on Zero	±0.02%F.S/10°C	±0.01 %F.S/10°C
Temperature effect on Sensitity	±0.02%F.S/10°C	±0.01 %F.S/10°C
Total error	±0.02%F.S	±0.01 %F.S
Creep (30min)	±0.02%F.S	±0.01 %F.S
Input Resistance	1100±10Ω	
Output Resistance	1000±1Ω	
Operating Temperature Range	-30~+70°C	
Insulation Resistance	≥5000MΩ	
Safe Overload	150%F.S	
Destructive Load	300%F.S	
Excitation Recommend	4~12VDC Max:15VDC	
Construction	Stainless steel, IP68	
Application for	Floor scales, Pallet scales, Weighing modules, etc.	


Cable length:

4 Core cable standard lengths: 3m (454~2268kg), 6m(5099kg)

Diameter: Φ5

Option: Customized cable length

Connection mode:

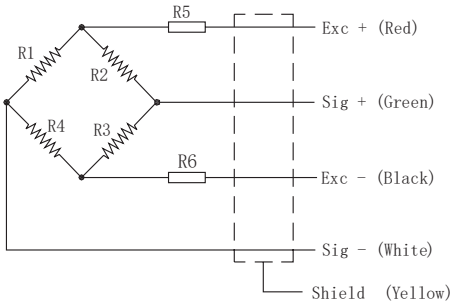

Dimension / Capacity	L1	L2	L3	L4	L5	H1	H2	H3	H4	W	D1	D2
227/454kg	133.4	12.7	76.2	25.4	60.0	31.0	28.8	15.0	4.0	30.0	18.0	13.5
1134/2268kg	133.4	12.7	76.2	25.4	60.0	32.0	30.7	15.0	4.0	30.0	18.0	13.5
5099kg	190.0	21.0	105	40.0	93.0	49.0	41.0	20.5	8.0	43.0	25.0	21.0