
LP7110H



Dimensions:

Unit (mm)

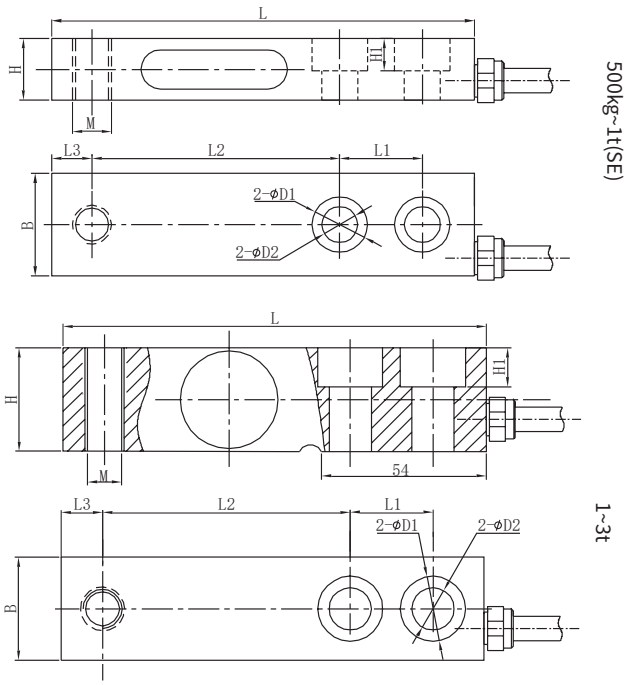

Rated Capacity	500kg, 1/2/2.5/3t
Accuracy Class	C3
Rated Output	2.0±0.002mV/V
Temperature effect on Zero	±0.02%F.S/10°C
Temperature effect on Sensitity	±0.02%F.S/10°C
Creep (30min)	±0.02%F.S
Input Resistance	385±10Ω
Output Resistance	351±2Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ (at 50VDC)
Safe Overload	150%F.S
Destructive Load	300%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel
Protection class	IP67
Application for	Floor scales, Pallet scales, Weighing modules, etc.


Cable length:

4 Core cable standard lengths: 3m(500kg~3t)

Diameter: Φ5

Option: Customized cable length

Connection mode:

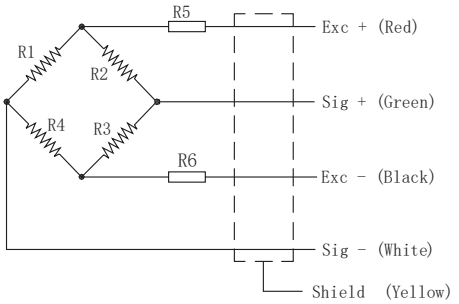

Dimension / Capacity	L	L1	L2	L3	H	B	D1	D2	M
500kg~1t(SE)	130	25.4	76.2	12.7	19	31.5	17	11	M12
1~3t	130	25.4	76.2	12.7	31.8	31.8	20	13	M12