
LP7110HC



Dimensions:

Unit (mm)

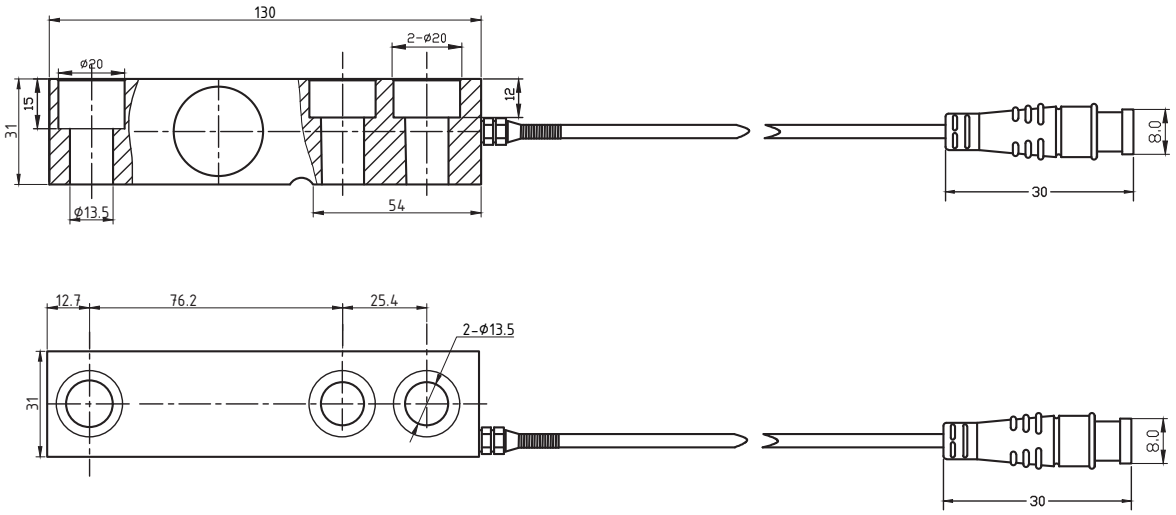

Rated Capacity	1t
Rated Output	2.0±0.1%mV/V
Total error	±0.02%F.S
Creep (30min)	±0.02%F.S
Input Resistance	400±10Ω
Output Resistance	351±2Ω
Operating Temperature Range	-30~+70℃
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel

Connection mode:

