
LP7134





Dimensions:

Unit

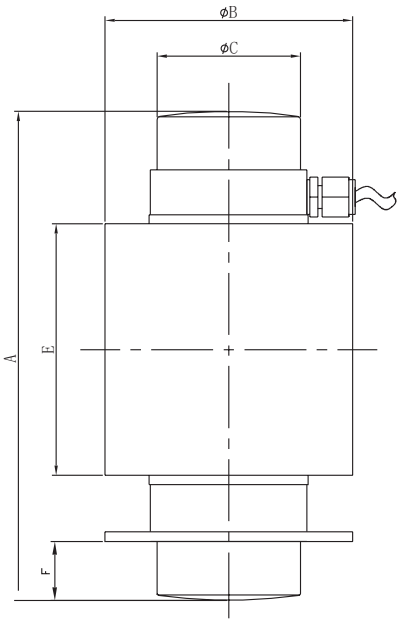

Rated Capacity	10t/20t/30t/40t/50t
Accuracy Class	OIML C3 NTEP n_{max}: 5000, Class III, Multiple Cell n_{max}: 10 000, Class III L, Multiple Cell
Y=Emax/Vmin	See NTEP cert. 20-021
Rated Output	2.0±0.002mV/V
Temperature effect on Zero	±0.02%F.S/10°C
Temperature effect on Sensitity	±0.02%F.S/10°C
Creep (30min)	±0.02%F.S
Input Resistance	700±10Ω
Output Resistance	702±2Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ (at 50VDC)
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel
Protection class	IP68
Application for	Hopper, Soil, Weighing bridge, etc.


Cable length:

4 Core cable standard lengths: 45ft

Diameter:Φ0.2inch

Option: Customized cable length

Connection mode:

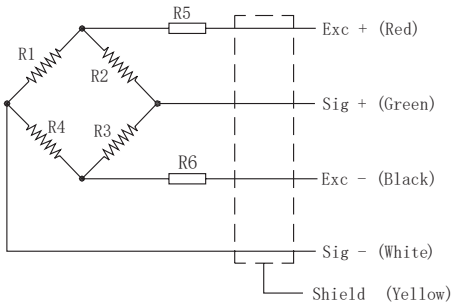

Dimension / Capacity	A	B	C	E	F
10t~50t(inch)	5.91	2.99	1.73	3.23	0.62
10t~50t(mm)	150	76	44	82	15.7