

LP7162

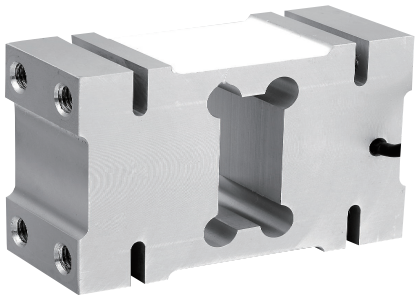

Dimensions:

Unit (mm)

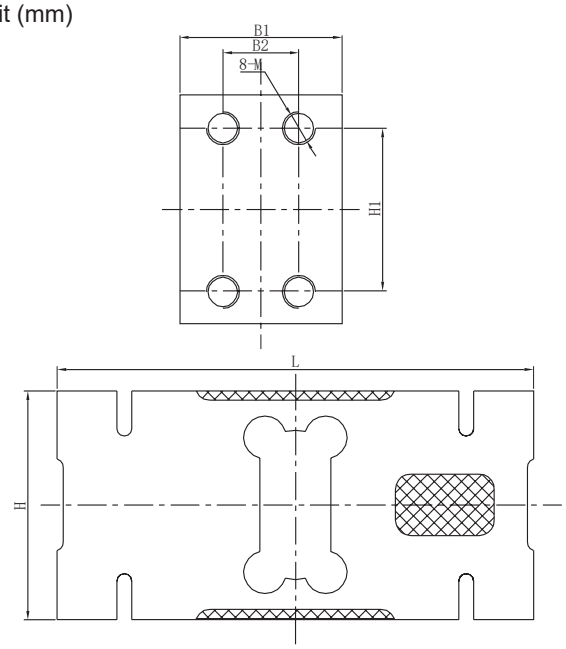

Rated Capacity	50/100/150/200/250/300/500/600/750/1000/1500/2000kg
Total error	±0.02%F.S
Rated Output	2.0±0.2mV/V
Temperature effect on Zero	±0.02%F.S/10℃
Temperature effect on Sensitity	±0.02%F.S/10℃
Creep (30min)	±0.016%F.S
Input Resistance	406±10Ω
Output Resistance	350±3Ω
Operating Temperature Range	-30~+70℃
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	300%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Aluminum,alloy steel or stainless steel
Protection class	IP67
Application for	Bench/Counting scales, Checkweigher, etc.


Cable length:

4 Core cable standard lengths: 2m(50~500kg)

Diameter: Φ5

Option: Customized cable length

Connection mode:

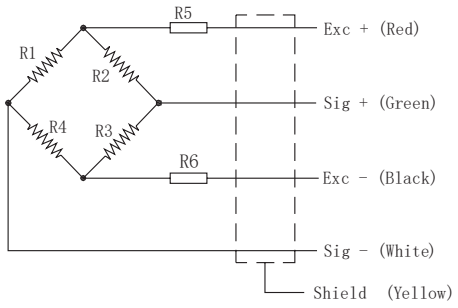

Capacity \ Dimension	H	H1	L	B1	B2	M
50~200kg	75	50	156	44	24	M12*1.75
250~500kg	95	70	146	60	36	M12*1.75
750~2000kg	125	95	176	76	46	M16*2