

LP7162E

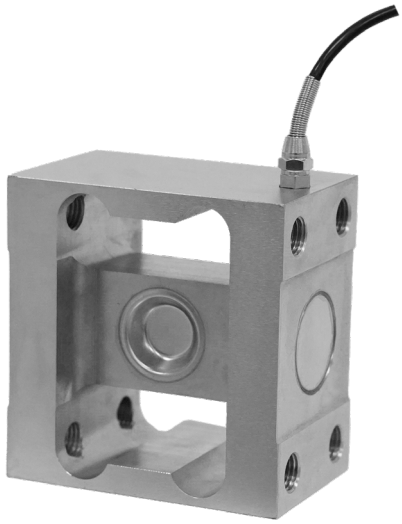

Dimensions:

Unit (mm)

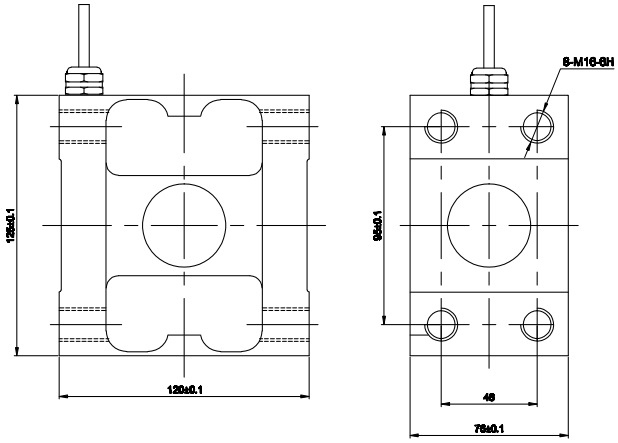

Rated Capacity	1000/2000/3000/4000kg
Total error	±0.03% F.S
Rated Output	2.0±0.2mV/V
Creep (30min)	±0.03% F.S
Input Resistance	385±10Ω
Output Resistance	351±2Ω
Operating Temperature Range	-10~+40℃
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy Steel or Stainless steel
Protection class	IP67
Application for	Platform scale, compression testing situation

Cable length:

4 Core cable standard lengths: 0.5m

Option: Customized cable length

Connection mode:

