

LP7163

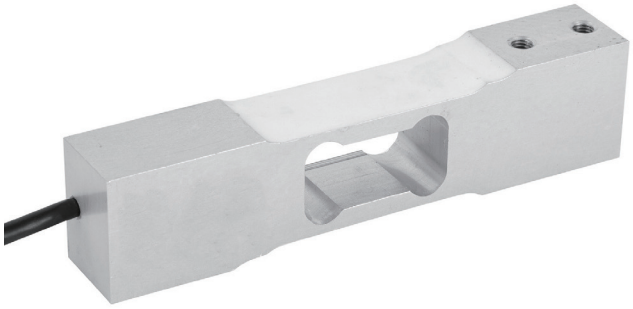

Dimensions:

Unit (mm)

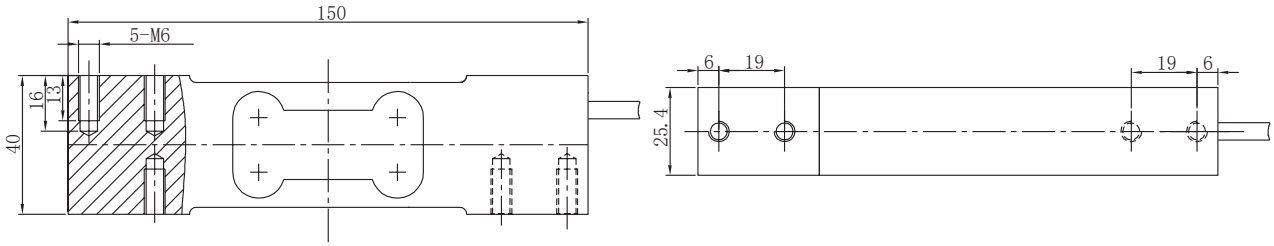

Rated Capacity	10/15/20/30/50/75/100/125/150/200kg
Total error	±0.02%F.S
Rated Output	2.0±0.2mV/V
Temperature effect on Zero	±0.02%F.S/10°C
Temperature effect on Sensitity	±0.02%F.S/10°C
Creep (30min)	±0.016%F.S
Input Resistance	406±10Ω
Output Resistance	350±3Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ (at 50VDC)
Safe Overload	150%F.S
Destructive Load	300%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Aluminum,alloy steel or stainless steel
Protection class	IP67
Application for	Waterproof bench/Counting scales, Checkweigher, etc.

Cable length:

4 Core cable standard lengths: 2m(50~500kg)

Diameter: Φ5

Option: Customized cable length

Connection mode:

