

LP7164G



Dimensions:

Unit (mm)

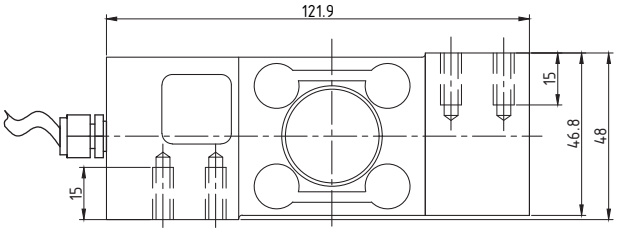

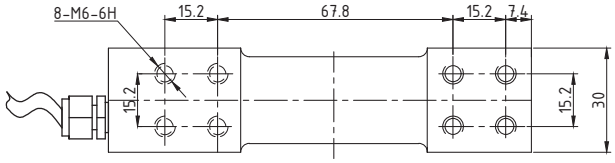

Rated Capacity	50/100/200/300 kg
Accuracy Class	C3
Rated Output	2.0±0.2mV/V
Creep (30min)	±0.02%F.S
Input Resistance	385±10Ω
Output Resistance	350±3Ω
Operating Temperature Range	-30~+70℃
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	300%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel
Protection class	IP68
Application for	Bench/Counting scales, check weighing, Warehouse Pallet Scale, Sorting scales etc.

Cable length:

4 Core cable standard lengths: 2m(50~300kg)

Diameter: Φ5

Option: Customized cable length

Connection mode:

