

LP7164Q



Dimensions:

Unit (mm)

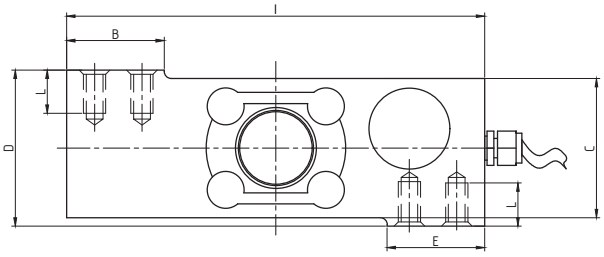

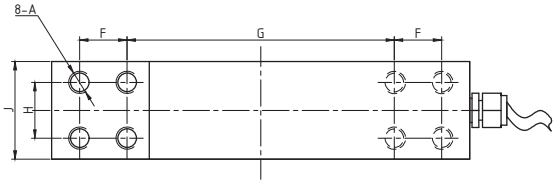

Rated Capacity	50/100/200/250/350/400/500 kg
Accuracy Class	C3
Rated Output	2.0±0.2mV/V
Creep (30min)	±0.02%F.S
Input Resistance	385±10Ω
Output Resistance	350±3Ω
Operating Temperature Range	-30~+70℃
Safe Overload	150%F.S
Destructive Load	300%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel
Protection class	IP68
Application for	Bench/Counting scales, check weighing, Warehouse Pallet Scale, Sorting scales etc.


Cable length:

4 Core cable standard lengths: 2m(50~500kg)

Diameter: Φ5

Option: Customized cable length

Connection mode:

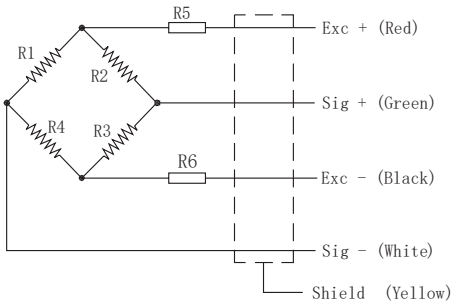

Dimension / Capacity	A	B	C	D	E	F	G	H	I	J	L
50/100/200/250/350kg	M8X1.25	35	50	56	35	17	96	20	150	35	14
400/500kg	M10X1.5	50	60	66	50	30	100	40	180	60	20