

LP7166

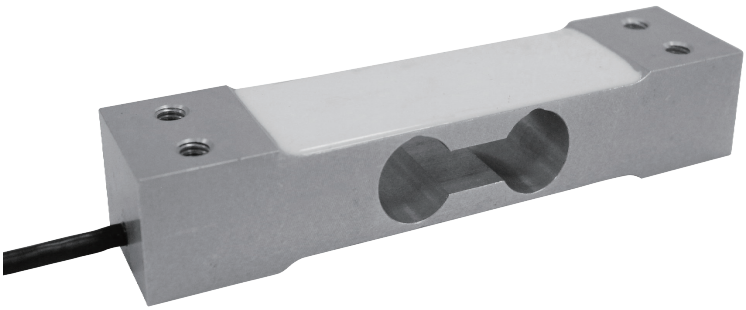

Dimensions:

Unit (mm)

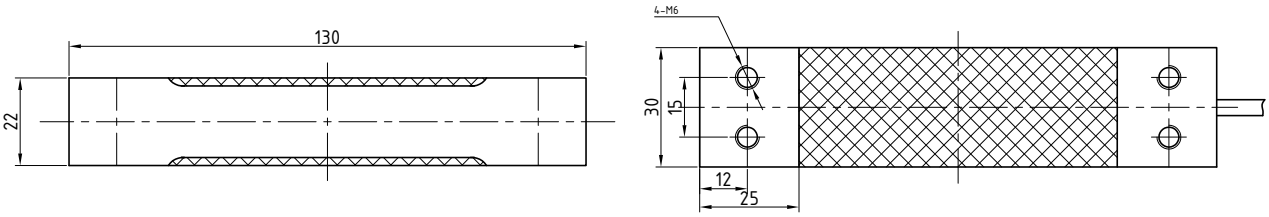

Rated Capacity	2.5/3/5/6/8/10/15/20/30/35/40/50kg
Accuracy Class	C3
Rated Output	2.0±0.2 mV/V
Creep (30min)	±0.016%F.S
Input Resistance	406±10Ω
Output Resistance	350±3Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	120%F.S
Destructive Load	150%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Aluminum,alloy steel or stainless steel
Protection class	IP65
Application for	Bench/Counting scales, Checkweigher, etc.

Cable length:

4 Core cable standard lengths: 2m(50~500kg)

Diameter: Φ5

Option: Customized cable length

Connection mode:

