

LP7166F

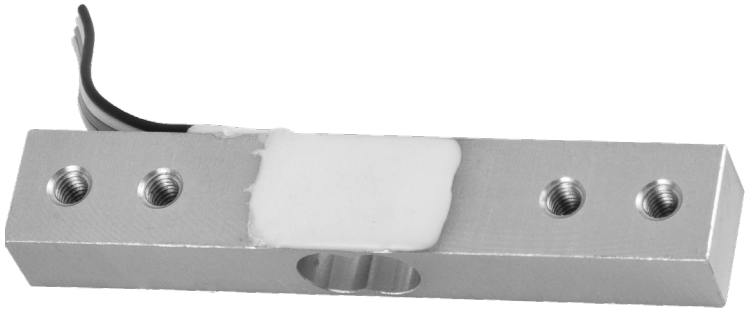

Dimensions:

Unit (mm)

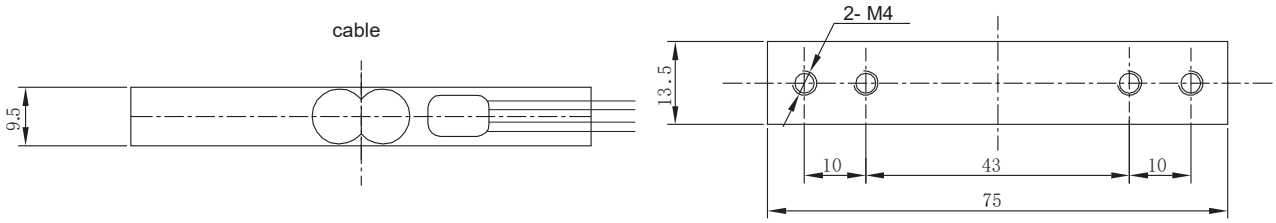

Rated Capacity	5/10/20/30/50kg
Total error	±0.05%F.S
Temperature effect on Zero	±0.02%F.S/10°C
Temperature effect on Sensitity	±0.02%F.S/10°C
Rated Output	1.0±0.1mV/V
Creep (30min)	±0.05%F.S
Input Resistance	1000±50Ω
Output Resistance	1000±50Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ (at 50VDC)
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Aluminum,alloy steel or stainless steel
Protection class	IP67
Application for	Waterproof bench/Counting scales, Checkweigher, etc.

Cable length:

4 Core cable standard lengths: 0.2m(5~50kg)

Diameter: Φ5

Option: Customized cable length

Connection mode:

