
LP7184



Dimensions:

Unit (mm)

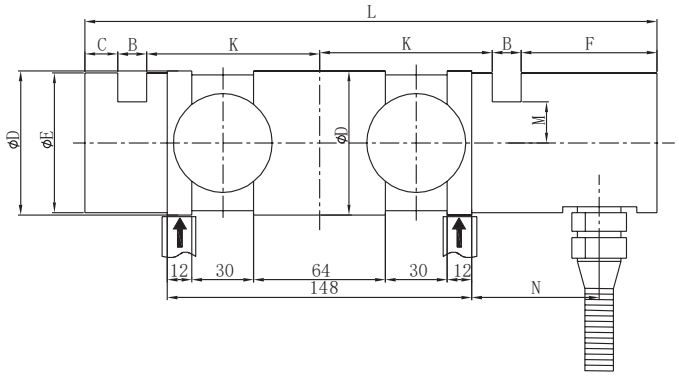

Rated Capacity	2/3/5/10/20/30/50t
Total error	±0.5%F.S
Rated Output	1.5±0.5mV/V
Temperature effect on Zero	±0.05%F.S/10°C
Temperature effect on Sensitity	±0.05%F.S/10°C
Creep (30min)	±0.05%F.S
Input Resistance	700±10Ω
Output Resistance	702±2Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	300%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel/Stainless steel
Protection class	IP67
Application for	Every kinds of safe limiter


Cable length:

4 Core cable standard lengths: 6m(2~50t)

Diameter: Φ6

Option: Customized cable length

Connection mode:

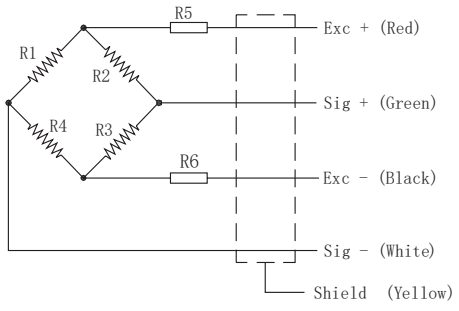

Dimension / Capacity	A	B	C	D	E	F	G	H	J	K	L	M	N
2t	6	7	8	35	34	33	74	32	15	42	139	10	25
3~5t	8	7	8	40	39	38	85	35	17	50	160	12	25
10t	10	9	8	50	48	51	110	46	22	64	205	15	40
20t	14	14	11	70	68	46	152	64	30	85	255	23	40
30t	17	14	12	85	83	46	186	78	37	102	290	28	40
50t	21	18	16	105	103	48	230	96	46	129	356	36	61