

LP7191




Dimensions:

Unit (mm)

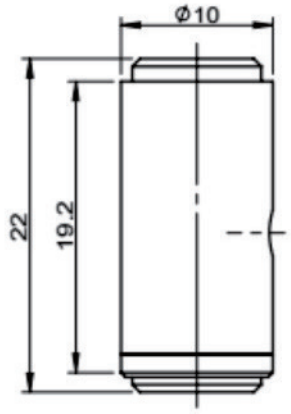




Load direction:



Connection mode:

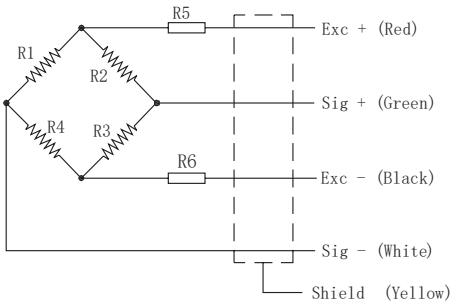

Capacity	10,20,30,50,100N
Rated Output	2.0±10%mV/V
Zero Balance	±2% F.S.
Non-linearity	0.1%F.S.
Hysteresis	0.1%F.S.
Repeatability	0.1%F.S.
Temp.effect on Output	0.05%FS./10°C
Temp.effect on Zero	0.05%FS./10°C
Input Impedance	350±30Ω
Output Impedance	350±10Q
Insulation	≥5000MQ/100VDC
Recommended Excitation	5~12V
Maximum Excitation	15V
Compensated Temp Range	-10~60°C
Operation Temp Range	-20~80°C
Safe Overload	150%FS.
Ultimate Overload	200%F.S.
Cable Size	φ2x3000mm