LP7622B


Ultra-Low Profile Floor Scale





※ Dimensions:

♦ Unit (inch)

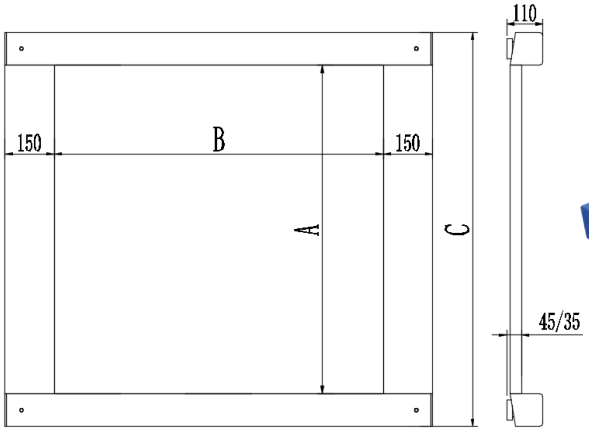

※ Technical Parameters

- ♦ Accuracy class: (III)
- ♦ e_{min}: 0.2 lb
- ♦ n_{max}: 5,000
- ♦ Capacity: 1,000 lb to 5,000 lb
- ♦ Display: 6-digit 0.8" LED or 1" LCD with backlight
- ♦ Using environment: -10°C ~+40°C (14 ° F to 104 ° F), ⩽ 85%RH
- ♦ Power supply: AC110~220V 50/60Hz, built-in DC6V/4Ah lead-acid battery (optional: lithium battery DC6V/6Ah)

※ Structural Features

- ♦ Low profile, 1.8" high
- ♦ Ultra short ramp: 6"
- ♦ U-shaped steel welded structure, high strength
- ♦ Material: carbon steel or stainless steel, chequered plate
- ♦ Carbon steel platform is shot blasted, powder coated or galvanized
- ♦ Stainless steel platform surface is polished and brushed
- ♦ Four alloy steel or stainless steel load cells

※ Product Functions:



Accumulate | Hold | Animal weighing | Checking | Sorting | Rechargeable battery | RS232 | RS485(optional) | Printer(optional) | Bluetooth(optional) | Zigbee(optional)

※ Types & Specifications:

Item No.	Capacity (lb)	A	B	C	Weight(lb)	Ctn Size(inch)
LP7622B-3030	1000/3000/5000	30	30	34	151	34.4*42.4*2.4
LP7622B-3636	1000/3000/5000	36	36	40	186	40.4*48.4*2.4
LP7622B-4848	1000/3000/5000	48	48	52	275	52.4*60.4*2.4

※ Customizable