
LP7622K

开启式超低平台秤










※ Dimensions:

♦ Unit (inch)

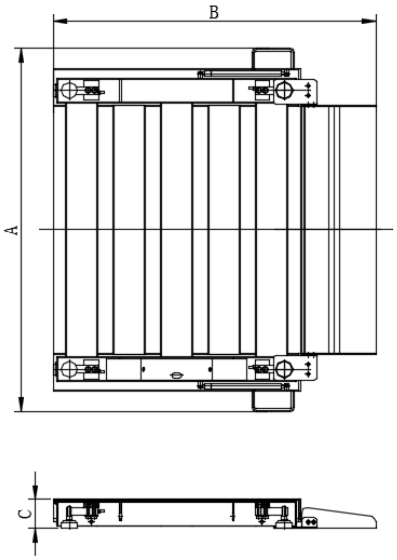

※ Structural Features

- ♦ Low profile, 1.5" high
- ♦ Ultra short ramp: 4"
- ♦ U-shaped steel welded structure, high strength
- ♦ Material: 304 stainless steel plate
- ♦ 304 stainless steel weighing frame with polished & brushed finish
- ♦ Four alloy steel or stainless steel load cells

※ Technical Parameters

- ♦ Accuracy class: (III)
- ♦ e_{min}: 0.2 lb
- ♦ n_{max}: 5,000
- ♦ Capacity: 1,000 lb to 5,000 lb
- ♦ Display: 6-digit 0.8" LED or 1" LCD with backlight
- ♦ Using environment: -10°C ~+40°C (14 ° F to 104 ° F), ⩽ 85%RH
- ♦ Power supply: AC110~220V 50/60Hz, built-in DC6V/4Ah lead-acid battery (optional: lithium battery DC6V/6Ah)

※ Additional Notes

- ♦ Low-profile, fits nearly all industrial weighing environments
- ♦ Sanitary design, clean room compatible
- ♦ Tolerates heavy-duty cleaners
- ♦ Dry or wet cleaning available
- ♦ Heavy-duty build, long service life
- ♦ Ultra-low platform with ramps (space-saving); opposite side stop plate
- ♦ Stationary use. Platform tilt-up for under-scale & floor cleaning, single-person operation

※ Product Functions:



Accumulate | Hold | Animal weighing | Checking | Sorting | Rechargeable battery | RS232 | RS485(optional) | Printer(optional) | Bluetooth(optional) | Zigbee(optional)

※ Types & Specifications:

Item No.	Capacity (lb)	A	B	C	Weight(lb)	Ctn Size(inch)
LP7622K- 32× 32	1000 ~ 6000	46.5	51.6	11.2	352.7	48.43 × 41.73 × 12.60
LP7622K- 39.4 × 39.4	1000 ~ 6000	55.1	59.5	11.2	463.0	57.09 × 47.24 × 12.6
LP7622K- 47.2 × 47.2	1000 ~ 6000	63.0	67.4	14.5	639.3	64.17 × 56.30 × 15.75

※ 支持客户定制