
LP7620

Floor Scale

※ Dimensions:

♦ Unit (inch)



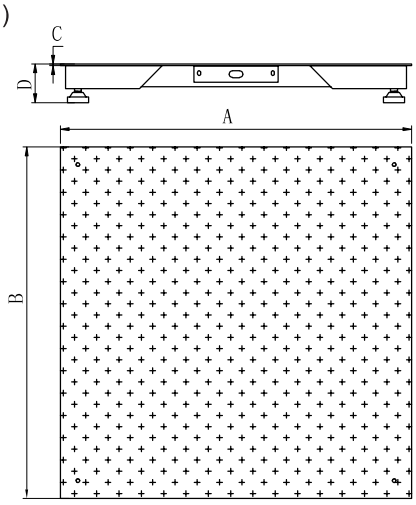

※ Technical Parameters

- ♦ Accuracy class: (III)
- ♦ e_{min}: 0.2 lb
- ♦ n_{max}: 5,000
- ♦ Capacity: 1,000 lb to 20,000 lb
- ♦ Display: 6-digit 0.8" LED or 1" LCD with backlight
- ♦ Using environment: -10°C ~+40°C (14 ° F to 104 ° F), ⩽ 85%RH
- ♦ Power supply: AC110~220V 50/60Hz, built-in DC6V/4Ah lead-acid battery (optional: lithium battery DC6V/6Ah)

※ Structural Features

- ♦ U-shaped steel welded structure, high strength
- ♦ Material: carbon steel, chequered plate or flat panel
- ♦ Carbon steel platform is shot blasted, powder coated or galvanized
- ♦ Four high precision shear beam load cells


※ Product Functions:



Accumulate | Hold | Animal weighing | Checking | Sorting | Rechargeable battery | RS232 | RS485(optional) | Printer(optional) | Bluetooth(optional) | Zigbee(optional)

※ Scales:



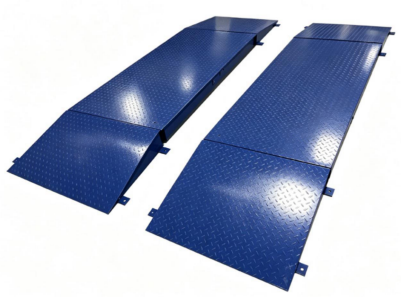



Various Indicator Columns

※ Types & Specifications:

Item No.	Capacity (lb)	A	B	C	D	Weight(lb)	Ctn Size(inch)
LP7620-2424	1000/3000/5000	24	24	0.25	4.5	58	24.4*24.4*2.4
LP7620-3636	1000/3000/5000	36	36	0.25	4.5	113	36.4*36.4*2.4
LP7620-4848	3000/5000/10000	48	48	0.25	4.5	191	48.4*48.4*2.4
LP7620-4860	3000/5000/10000	48	60	0.25	4.5	228	48.4*60.4*2.4
LP7620-6060	3000/5000/10000	60	60	0.25	4.5	268	60.4*60.4*2.4
LP7620-4872	3000/5000/10000	48	72	0.25	4.5	279	48.4*72.4*2.4
LP7620-6072	5000/10000/20000	60	72	0.25/0.3	4.5	330	60.4*72.4*2.4
LP7620-7272	5000/10000/20000	72	72	0.25/0.3	4.5	403	72.4*72.4*2.4
LP7620-8484	5000/10000/20000	84	84	0.25/0.3	4.5	516	84.4*84.4*2.4

※ Customizable


Floor scale with four lift-up corner covers for easy load cell access.



Galvanized Finish



Scale Access Ramp

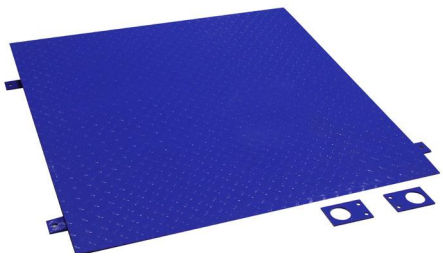

Smooth Deck

